



TOP VIEW
正视图




SIDE VIEW
侧视图

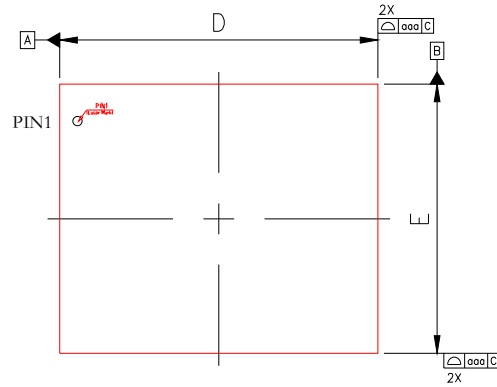

BOTTOM VIEW
背视图

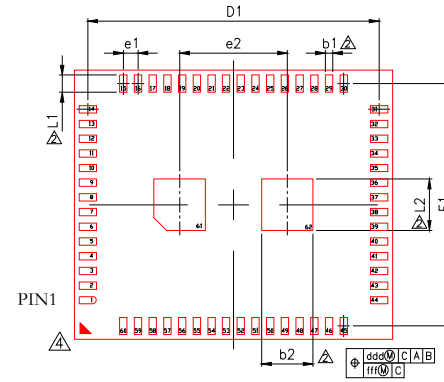

SIDE VIEW
侧视图

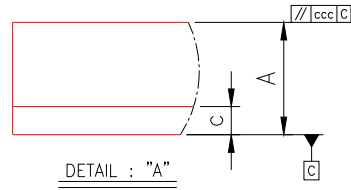

字符 Symbol	机械尺寸/ mm			机械尺寸/ inch		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.260	1.310	1.360	0.050	0.052	0.054
c	0.234	0.260	0.286	0.009	0.010	0.011
D	12.90	13.00	13.10	0.508	0.512	0.516
E	10.90	11.00	11.10	0.429	0.433	0.437
D1	---	11.90	---	---	0.469	---
E1	---	9.90	---	---	0.390	---
e1	---	0.60	---	---	0.024	---
e2	---	4.40	---	---	0.173	---
b1	0.27	0.30	0.33	0.011	0.012	0.013
b2	2.07	2.10	2.13	0.081	0.083	0.084
L1	0.67	0.70	0.73	0.026	0.028	0.029
L2	2.07	2.10	2.13	0.081	0.083	0.084
aaa	0.15			0.006		
ccc	0.15			0.006		
dodd	0.15			0.006		
fff	0.08			0.003		

REVISION HISTORY :

ITEM	Rev.	DESCRIPTION OF CHANGE	DATE	DESIGN BY
1	A	1. New issue.	03-28-2024	Ning Lin

NOTE:

1.控制尺寸: 毫米
CONTROLLING DIMENSION: MILLIMETER

△在平行于主基准C的最大开口直径处测量尺寸b、b1、L、L1。
DIMENSION b,b1,L,L1 IS MEASURED, AT THE MAXIMUM OPENING DIAMETER, PARALLEL TO PRIMARY DATUM C.

3. 特殊特性C类: ccc。
SPECIAL CHARACTERISTICS C CLASS: ccc.

△引脚1基准的图案仅供参考
THE PATTERN OF PIN 1 FIDUCIAL IS FOR REFERENCE ONLY.

池州华宇电子科技股份有限公司 CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD				制图: Draw	NINGLIN 2024. 3. 28
HY-POD-LGA0015				制图核查: Drawing review	
PACKAGE OUTLINE DIMENSIONS LGA62L (13×11×1.31-P0.6)				审核: Checker	
页数 page	单位 unit	比例 scale	视图 view	核准: Approved	
	mm	1:1			