


 池州华宇电子科技股份有限公司 CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD 焊线图纸 Bonding Diagram				客户代码 Customer No.	线图号 Drawing No.	封装外型 PKG Type	LGA24L(7.0×9.0×1.31-P1.00)
焊线种类 Wire Type	焊线直径(μm) Wire Diameter	焊线根数 NO. of wire	焊线总长(μm) Total wire length	最长线长(μm) Longest wire length	最短线长(μm) Shortest wire length	塑封料型号(绿色环保) Compound Type (Green)	基板编码 Substrate No.
合金丝 Ag	20			806	437	首选(Preferred): G760L TypeA 备选(Optional):	
劈刀型号 Capillary Type				客户图号 Customer drawing NO.			

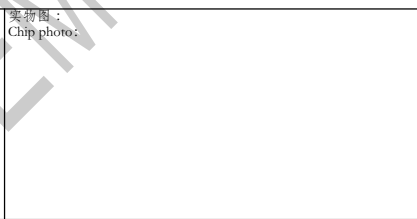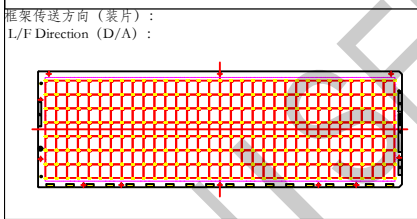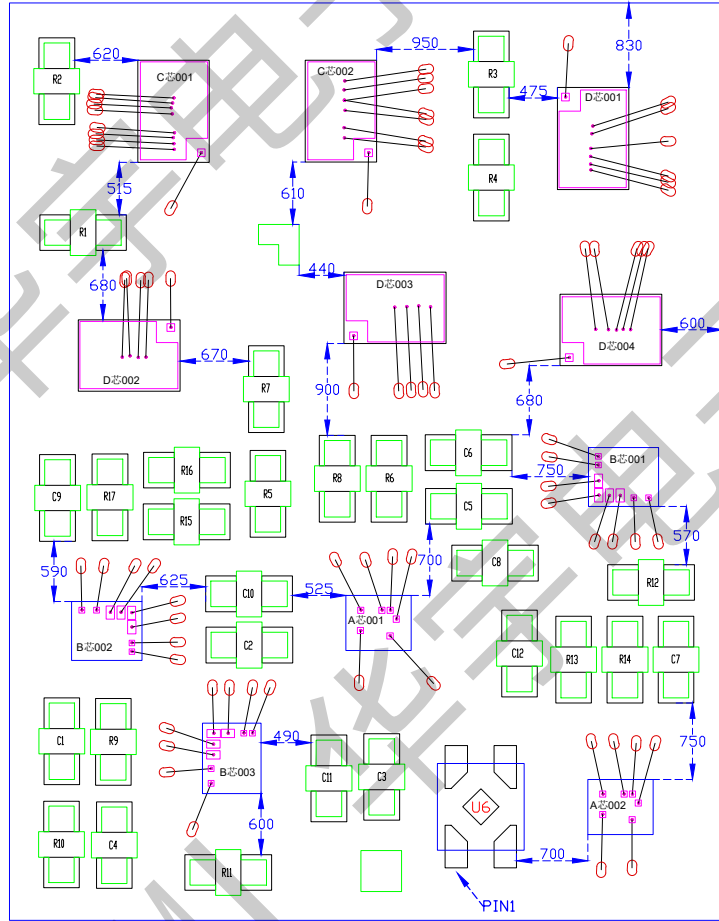

特殊说明 Special Instructions:

DB注意:
1. 装片位置公差为±30μm;
2. 控制溢胶, 为WB预留焊线位置。

WB注意:
数字为不打线pad个数。

说明 Instructions	粘片胶类型 epoxy type	芯片名称 Die name	芯片尺寸 Die Size	最小焊盘尺寸 Min BPO (μm²)	最小焊盘间距 Min BPP(μm)	铝垫厚度(μm) Pad Thickness	焊盘下是否有电路 Circuit under Pad	划片道宽度 Street line (μm)	晶圆尺寸 Wafer Size	是否是 Low-K 材料? If low-k?	减薄厚度 (μm) Wafer Thickness
A芯: DIE A	绝缘胶 (Non-conductive) 2025DSI		560*460(μm²) 22.04*18.11(mi²)	60*60	80	0.8	是/Yes	80	8	否/N0	200
B芯: DIE B	绝缘胶 (Non-conductive) 2025DSI		571*630(μm²) 22.48*24.80(mi²)	75*75	85	0.8	是/Yes	60	8	否/N0	200
C芯: DIE C	导电胶 (conductivity) S220		986*686(μm²) 38.81*27.00(mi²)	137*137	NA	4.0	否/N0	60	12	否/N0	150±15 (材料厚度)
D芯: DIE D	导电胶 (conductivity) S220		980*690(μm²) 38.58*27.16(mi²)	130*130	NA	4.0	否/N0	60	8	否/N0	160 (材料厚度)
E芯: DIE E											
F芯: DIE F											
G芯: DIE G											


制图日期 Create Date					生效日期 Effective Date			客户确认签字/盖章: Customer Signature			
拟制 Prepared by				审核 Checked by			批准 Approved by				

*温馨提示: 图纸为产品下线生产的唯一依据, 请您认真确认, 我可依据您回签后的图纸生产, 如图纸错误会产生不可估量损失, 谢谢!
*warm tips: the drawing is the only basis for the production of the product. Please confirm it carefully. Our company will produce the drawings according to the drawings you have signed back, such as drawing mistakes, which will produce inestimable loss. Thank you



池州华宇电子科技股份有限公司
CHI ZHOU HISEMI ELECTRONICS TECHNOLOGY CO.,LTD
焊线图纸 Bonding Diagram

客户代码 Customer No.		线图号 Drawing No.	
产品名称 Product Type		封装外型 PKG Type	LGA24L(7.0×9.0×1.31-P1.00)
焊线种类 Wire Type	焊线直径(μm) Wire Diameter	焊线根数 NO. of wire	焊线总长(μm) Total wire length
合金丝 Ag	20		
		最长线长(μm) Longest wire length	最短线长(μm) Shortest wire length
		806	437
剪刀型号 Capillary Type		客户图号 Customer drawing NO.	

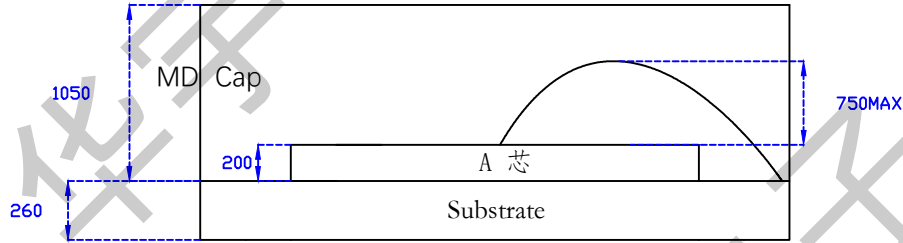

NO.	Item	Reference	value		package	Quantity
1	片式电容	C9	6.8nF	25V	0201	1
2	片式电容	C2,C3,C4,C5,C6,C8,C10,C11,C12	0.1uF/50V	50V	0201	9
3	片式电容	C1,C7	1.5nF/50V	50V	0201	2
4	片式电阻	R1,R2,R3,R4,R7,R8,R9,R12	100K	1/16W 1%	0201	8
5	片式电阻	R5,R6,R17	3.3K	1/16W 1%	0201	3
6	片式电阻	R10,R13	15K	1/16W 1%	0201	2
7	片式电阻	R11,R14	3.9K	1/16W 1%	0201	2
8	片式电阻	R15	39K	1/16W 1%	0201	1
9	片式电阻	R16	12K	1/16W 1%	0201	1
10	IC	U6			0.9*0.9mm	1
11	基板	substrate			/	1
12	锡膏	/	F590 SnCu0.7-89M4		/	/

制图日期 Create Date		生效日期 Effective Date		客户确认签字/盖章: Customer Signature
拟制 Prepared by		审核 Checked by		批准 Approved by

*温馨提示: 图纸为产品下线生产的唯一依据, 请您认真确认, 我司依据您回签后的图纸生产, 如图纸错误会产生不可估量损失, 谢谢!
 *warm tips: the drawing is the only basis for the production of the product. Please confirm it carefully. Our company will produce the drawings according to the drawings you have signed back, such as drawing mistakes, which will produce inestimable loss. Thank you